

Transmittance (T) units: %

| | | | | | | | | | | | | | | | | | | | | |
|-----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| λnm | 200 | 210 | 220 | 230 | 240 | 250 | 260 | 270 | 280 | 290 | 300 | 310 | 320 | 330 | 340 | 350 | 360 | 370 | 380 | 390 |
| T | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.5 | 3.2 | 6.8 | 6.2 | 17.1 |
| λnm | 400 | 410 | 420 | 430 | 440 | 450 | 460 | 470 | 480 | 490 | 500 | 510 | 520 | 530 | 540 | 550 | 560 | 570 | 580 | 590 |
| T | 24.2 | 24.0 | 24.3 | 26.0 | 25.9 | 28.4 | 31.5 | 32.2 | 31.8 | 31.4 | 31.3 | 31.5 | 31.7 | 32.1 | 32.7 | 33.3 | 33.6 | 33.0 | 31.7 | 30.3 |
| λnm | 600 | 610 | 620 | 630 | 640 | 650 | 660 | 670 | 680 | 690 | 700 | 710 | 720 | 730 | 740 | 750 | 760 | 770 | 780 | 790 |
| T | 29.8 | 30.0 | 30.2 | 30.1 | 29.5 | 29.0 | 28.9 | 29.2 | 30.3 | 31.5 | 32.3 | 32.5 | 32.1 | 31.3 | 30.2 | 29.0 | 27.8 | 26.6 | 25.5 | 24.4 |
| λnm | 800 | 810 | 820 | 830 | 840 | 850 | 860 | 870 | 880 | 890 | 900 | 910 | 920 | 930 | 940 | 950 | 960 | 970 | 980 | 990 |
| T | 23.5 | 22.7 | 22.0 | 21.2 | 20.6 | 20.0 | 19.5 | 19.0 | 18.5 | 18.1 | 17.7 | 17.3 | 16.8 | 16.5 | 16.1 | 15.8 | 15.5 | 15.2 | 14.9 | 14.6 |
| λnm | 1000 | 1010 | 1020 | 1030 | 1040 | 1050 | 1060 | 1070 | 1080 | 1090 | 1100 | 1120 | 1140 | 1160 | 1180 | 1200 | | | | |
| T | 14.4 | 14.2 | 14.0 | 13.8 | 13.6 | 13.4 | 13.3 | 13.2 | 13.1 | 13.0 | 12.9 | 12.8 | 12.8 | 12.8 | 12.9 | 13.1 | | | | |

Refractive Index/Absorption coefficient/Reflection coefficient

| | | | | | | | |
|-----|-------|-------|-------|-------|-------|-------|-------|
| λnm | 400 | 500 | 600 | 700 | 800 | 900 | 1000 |
| n | 1.538 | 1.524 | 1.517 | 1.513 | 1.510 | 1.508 | 1.507 |
| P | 0.914 | 0.917 | 0.919 | 0.920 | 0.921 | 0.921 | 0.921 |

Classes of Bubbles and Inclusions

| |
|--------------|
| Bubble Class |
| 3 |

Color Specification


| | | | | | |
|-----|-------|-------|----|----------------|----------------|
| | x | y | Y | λ _d | P _e |
| A | 0.444 | 0.417 | 32 | 560 | 4 |
| C | 0.312 | 0.332 | 32 | 556 | 5 |
| D65 | 0.314 | 0.344 | 32 | 556 | 5 |

Properties

| Chemical | | Thermal | | | | Mechanical | | Others |
|----------------|----------------|----------------|----------------|---------------------|----------------------|----------------|----------------|--------|
| D _w | D _A | T _g | T _s | α _{-30/70} | α _{100/300} | H _K | F _A | d |
| 1 | 2 | 535 | 600 | 62 | 66 | 550 | 100 | 2.42 |

Tolerance of Transmittance (T)

| | |
|--------------------------------------|-----------|
| Average Transmittance at 400nm-700nm | |
| Tav(%) | OD |
| 30±3 | 0.52±0.05 |

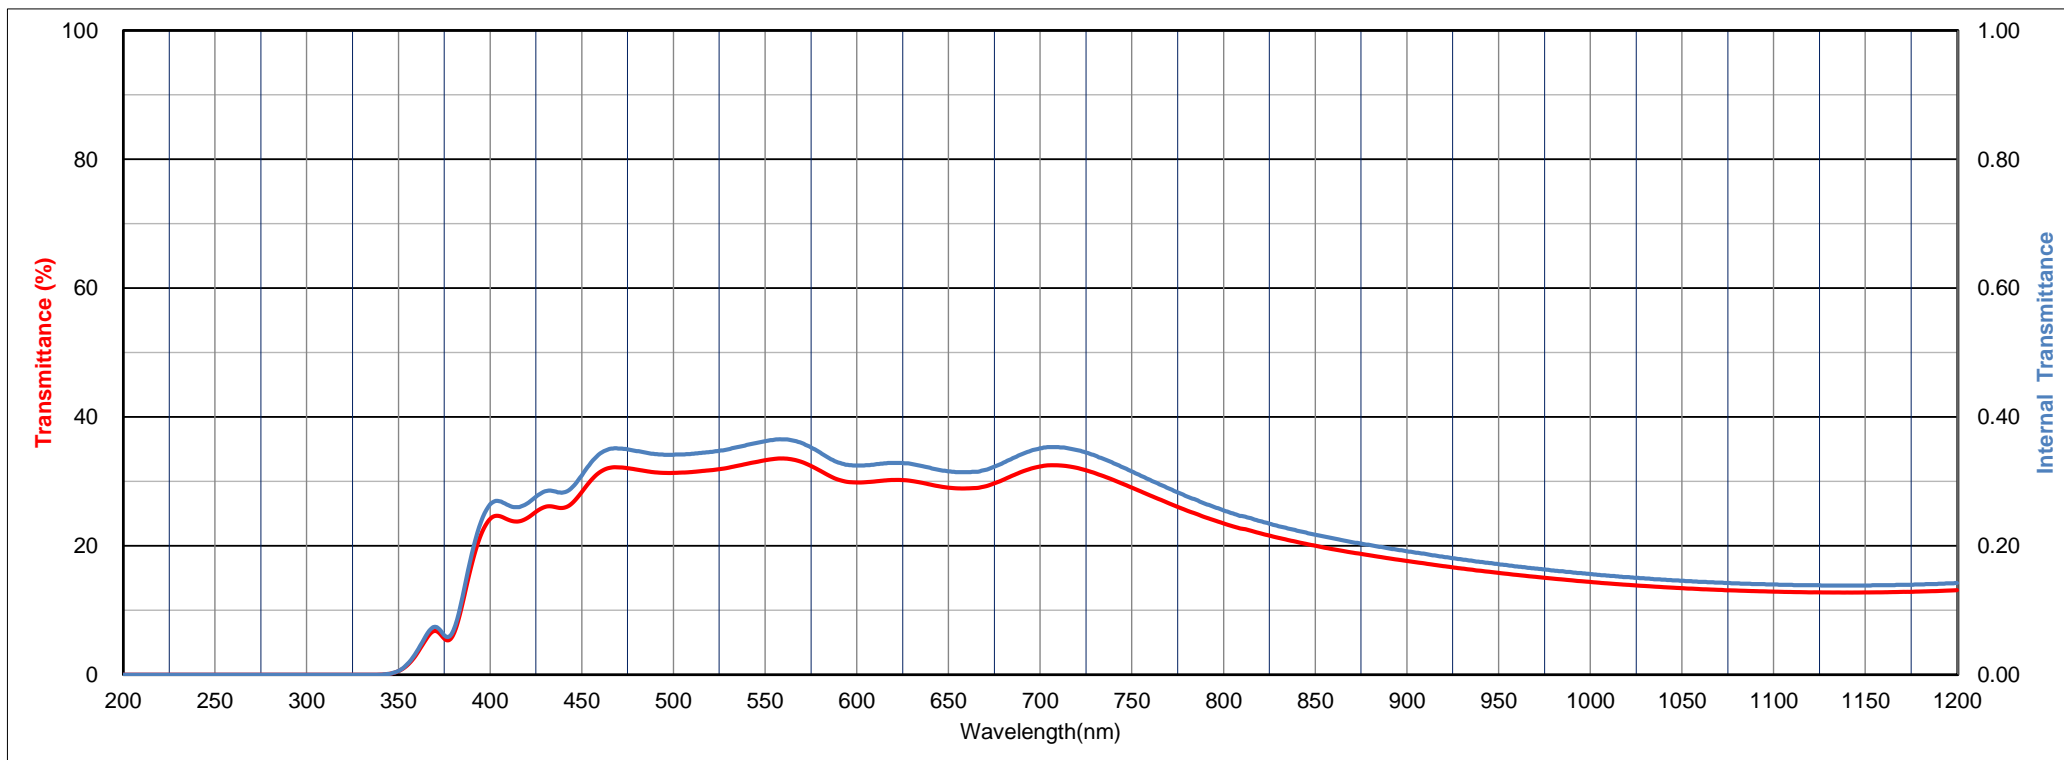

Transmittance (T) units: %

| | | | | | | | | | | | | | | | | | | | | |
|-----|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| λnm | 200 | 210 | 220 | 230 | 240 | 250 | 260 | 270 | 280 | 290 | 300 | 310 | 320 | 330 | 340 | 350 | 360 | 370 | 380 | 390 |
| T | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.0 | 0.5 | 3.2 | 6.8 | 6.2 | 17.1 |
| λnm | 400 | 410 | 420 | 430 | 440 | 450 | 460 | 470 | 480 | 490 | 500 | 510 | 520 | 530 | 540 | 550 | 560 | 570 | 580 | 590 |
| T | 24.2 | 24.0 | 24.3 | 26.0 | 25.9 | 28.4 | 31.5 | 32.2 | 31.8 | 31.4 | 31.3 | 31.5 | 31.7 | 32.1 | 32.7 | 33.3 | 33.6 | 33.0 | 31.7 | 30.3 |
| λnm | 600 | 610 | 620 | 630 | 640 | 650 | 660 | 670 | 680 | 690 | 700 | 710 | 720 | 730 | 740 | 750 | 760 | 770 | 780 | 790 |
| T | 29.8 | 30.0 | 30.2 | 30.1 | 29.5 | 29.0 | 28.9 | 29.2 | 30.3 | 31.5 | 32.3 | 32.5 | 32.1 | 31.3 | 30.2 | 29.0 | 27.8 | 26.6 | 25.5 | 24.4 |
| λnm | 800 | 810 | 820 | 830 | 840 | 850 | 860 | 870 | 880 | 890 | 900 | 910 | 920 | 930 | 940 | 950 | 960 | 970 | 980 | 990 |
| T | 23.5 | 22.7 | 22.0 | 21.2 | 20.6 | 20.0 | 19.5 | 19.0 | 18.5 | 18.1 | 17.7 | 17.3 | 16.8 | 16.5 | 16.1 | 15.8 | 15.5 | 15.2 | 14.9 | 14.6 |
| λnm | 1000 | 1010 | 1020 | 1030 | 1040 | 1050 | 1060 | 1070 | 1080 | 1090 | 1100 | 1110 | 1120 | 1130 | 1140 | 1150 | 1160 | 1170 | 1180 | 1190 |
| T | 14.4 | 14.2 | 14.0 | 13.8 | 13.6 | 13.4 | 13.3 | 13.2 | 13.1 | 13.0 | 12.9 | 12.8 | 12.8 | 12.8 | 12.8 | 12.8 | 12.8 | 12.9 | 12.9 | 13.0 |
| λnm | 1200 | 1210 | 1220 | 1230 | 1240 | 1250 | 1260 | 1270 | 1280 | 1290 | 1300 | 1310 | 1320 | 1330 | 1340 | 1350 | 1360 | 1370 | 1380 | 1390 |
| T | 13.1 | 13.3 | 13.4 | 13.6 | 13.8 | 14.1 | 14.4 | 14.7 | 15.0 | 15.4 | 15.8 | 16.0 | 16.5 | 17.0 | 17.6 | 18.0 | 18.6 | 19.0 | 19.3 | 19.7 |
| λnm | 1400 | 1410 | 1420 | 1430 | 1440 | 1450 | 1460 | 1470 | 1480 | 1490 | 1500 | 1510 | 1520 | 1530 | 1540 | 1550 | 1560 | 1570 | 1580 | 1590 |
| T | 20.1 | 20.6 | 21.2 | 21.8 | 22.3 | 22.7 | 23.2 | 23.7 | 24.2 | 24.7 | 25.2 | 25.6 | 26.1 | 26.5 | 27.0 | 27.3 | 27.8 | 28.2 | 28.5 | 28.9 |
| λnm | 1600 | 1610 | 1620 | 1630 | 1640 | 1650 | 1660 | 1670 | 1680 | 1690 | 1700 | 1710 | 1720 | 1730 | 1740 | 1750 | 1760 | 1770 | 1780 | 1790 |
| T | 29.2 | 29.5 | 29.8 | 30.0 | 30.3 | 30.5 | 30.7 | 31.0 | 31.1 | 31.4 | 31.5 | 31.7 | 31.9 | 32.1 | 32.2 | 32.4 | 32.5 | 32.7 | 32.9 | 33.1 |
| λnm | 1800 | 1810 | 1820 | 1830 | 1840 | 1850 | 1860 | 1870 | 1880 | 1890 | 1900 | 1910 | 1920 | 1930 | 1940 | 1950 | 1960 | 1970 | 1980 | 1990 |
| T | 33.3 | 33.4 | 33.6 | 33.8 | 34.1 | 34.3 | 34.5 | 34.7 | 34.9 | 35.1 | 35.3 | 35.5 | 35.7 | 35.9 | 36.1 | 36.3 | 36.5 | 36.7 | 36.8 | 37.0 |
| λnm | 2000 | 2050 | 2100 | 2150 | 2200 | 2250 | 2300 | 2350 | 2400 | 2450 | 2500 | 2550 | 2600 | 2650 | 2700 | 2750 | 2800 | 2850 | 2900 | 2950 |
| T | 37.2 | 38.1 | 38.7 | 39.2 | 39.4 | 40.0 | 41.1 | 41.7 | 41.8 | 42.0 | 42.0 | 42.1 | 42.2 | 42.3 | 42.4 | 42.5 | 42.6 | 42.7 | 42.6 | 42.4 |
| λnm | 3000 | 3050 | 3100 | 3150 | 3200 | 3250 | 3300 | 3350 | 3400 | 3450 | 3500 | 3550 | 3600 | 3650 | 3700 | 3750 | 3800 | 3850 | 3900 | 3950 |
| T | 41.8 | 40.7 | 37.5 | 29.0 | 18.0 | 10.6 | 6.7 | 4.8 | 3.9 | 3.6 | 3.4 | 3.3 | 3.3 | 3.3 | 3.4 | 3.5 | 3.6 | 3.7 | 3.8 | 3.9 |
| λnm | 4000 | 4050 | 4100 | 4150 | 4200 | 4250 | 4300 | 4350 | 4400 | 4450 | 4500 | 4550 | 4600 | 4650 | 4700 | 4750 | 4800 | 4850 | 4900 | 4950 |
| T | 4.0 | 4.2 | 4.3 | 4.4 | 4.5 | 4.7 | 4.8 | 4.9 | 5.0 | 5.2 | 5.3 | 5.4 | 5.5 | 5.6 | 5.7 | 5.8 | 5.9 | 6.1 | 6.1 | 6.2 |
| λnm | 5000 | | | | | | | | | | | | | | | | | | | |
| T | 6.4 | | | | | | | | | | | | | | | | | | | |

